




Rotary valve

- ZRS -

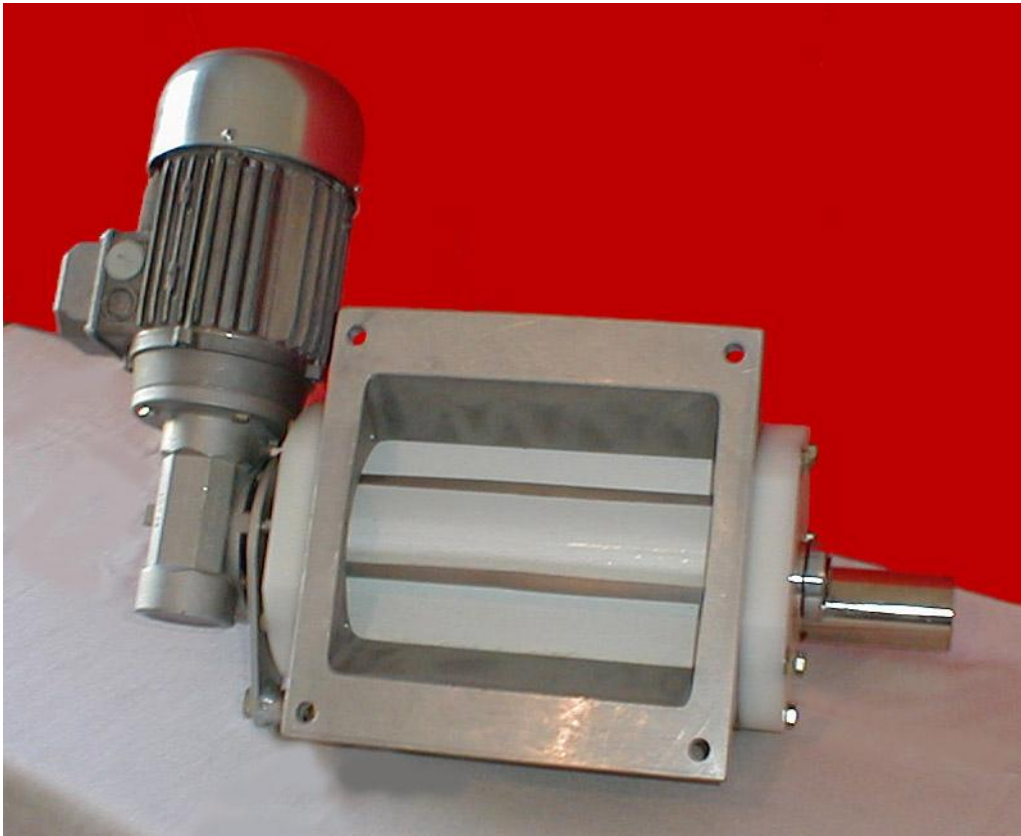

used as plug- and measuring valve at silo-plants

*

suitable for the pneumatic hauling of flour with suction- oder pressure-drive

*

output discharge 20 to maximal 75 kg per minute

*

various diametres of the connection-pipe sockets

*

robust construction; maintenance free

Specifications

Standard design:

Output discharge:

Cell rotor:

Casing:

Engine :

Connection-pipe socket:

Fastening flange:

Connection nozzle:

Dimension:

Weight:

Permanent sound pressure level:

Special design:

ZRS 50-20

20 kg/min (with filling weight 0,55 kg/liter and degree of filling 0,85)

speed: 17 r/min

delivery: 2,5 l/r steel-casting, plastic coating, crests grinded

aluminium-casting, approval for food

0,25 or 0,37 kW, 230/400 V, 50 Hz, IP55

With worm gear

d = external \varnothing 50 x 2, 70 mm long, stainless steel

external dimensions 254 x 260 mm

with 4 drillings, \varnothing 12 mm, distance 220 x 220 mm

1 inch with cap

L 550, W 390, H 215/250 mm

30 kg

below 70 dB (A)

* altered output discharge:

Upon request, to max. 75 kg/min

* connection pipe socket:

d = external \varnothing : 45 x 2; und 60 x 2mm

